

### Unrivalled combination of chemical resistance, confident grip and a comfortable inner lining make this glove ideal for outdoor application



- This unique combination of liquid proof chemical resistance and grip, together with flexibility and dexterity, makes the glove the logical choice when working with chemicals.

#### Industries

- Automotive
- Automotive Aftermarket
- Machinery and Equipment
- Metal fabrication
- Chemical

#### Applications

- Metalworking & assembly operations
- Body painting including surface inspection
- Applying sealers, touching up
- Changing tools and dies
- Handling application & cleaning tools
- Warehousing of raw materials
- Loading and unloading trucks and vehicles
- Filling, blending and charging of raw materials
- Transferring liquids and solids
- Loading and unloading of process equipment
- Transferring liquids and solids between vessels and tanks and process equipment
- Supervision of running operation
- Handling outgoing goods: cans, vessels, bulkpack and cartons
- Opening furnaces draining pumps valves or lines and crackers BTX process


### Key Features

- The glove incorporates revolutionary ANSELL GRIP™ technology to enable users to handle wet or oily objects using less force to grip, providing more control. This unique combination of liquid proof chemical resistance and grip, together with flexibility and dexterity, makes the AlphaTec glove the logical choice when working with chemicals.
- Reliable chemical protection for added user safety. The patented ANSELL GRIP™ technology ensures that the coating polymer does not penetrate the liner during manufacture. The coating is therefore consistent and sound, significantly reducing the likelihood of chemical leakage onto the skin.
- 58-530B with black acrylic liner are recommended for outdoor applications

### Technologies



### Performance Standards

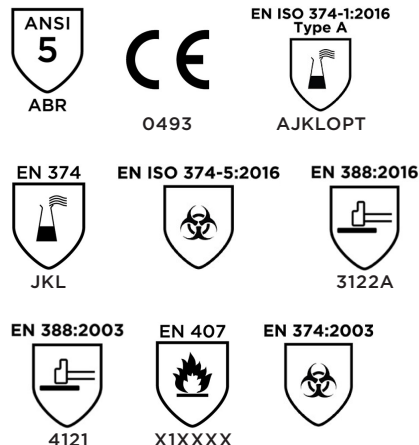

CHEMICAL AGENT	BREAKTHROUGH TIME
Methanol (A)	56
n-Heptane (J)	>480
Sodium hydroxide, 40% (K)	>480
Sulphuric acid, 96% (L)	34
Ammonium hydroxide, 25% (O)	288
Hydrogen peroxyde, 30% (P)	>480
Formaldehyde, 37% (T)	>480

PERMEATION BREAKTHROUGH TIMES ACCORDING TO EN 16523-1 : 2015 (MINUTES)						
0	1	2	3	4	5	6
< 10	10-30	30-60	60-120	120-240	240-480	> 480
Not recommended	Splash protection		Medium protection		High protection	

Data given in the table above are based on results of laboratory tests performed on the palm area of the glove. These tests were run using standard test methods that may not adequately replicate any specific conditions of end use. Because Ansell has no detailed knowledge or control over the conditions of end use, any of these data must be advisory only, and Ansell must decline any liability.

### Specifications

North America Region		Latin America & Caribbean Region		Canada		COLOR	PACKAGE
BRAND   STYLE	DESCRIPTION	GAUGE	SIZE	LENGTH	PACKAGING		
AlphaTec® 58-530B	Acrylic, Nitrile, Ansell Grip™	1304, 1305 y 1306	7, 8, 9, 10, 11	290-316 (11-12) inches	6 pairs/polybag; 12 polybags/carton	Gray	• 6 pairs/polybag; 12 polybags/carton
F: +1 800 800 0445		Queretaro, Qro. Mexico T: +52 442 248 1544 / 248 3133					

Ansell, ® and ™ are trademarks owned by Ansell Limited or one of its affiliates. US Patented and US and non-US Patents Pending: www.ansell.com/patentmarking © 2018 Ansell Limited. All Rights Reserved.

Neither this document nor any other statement made herein by or on behalf of Ansell should be construed as a warranty of merchantability or that any Ansell product is fit for a particular purpose. Ansell assumes no responsibility for the suitability or adequacy of an end user's selection of gloves for a specific application.